


# EUROMASK®

## HIGH TEMPERATURE TAPE EPR

### Features :

- EPR is a 100μ PET film with high performance silicone adhesive. Suitable for high temperature masking process.
- 220°C resistant
- powder coating and anodizing applications
- clean removal, no adhesive residue

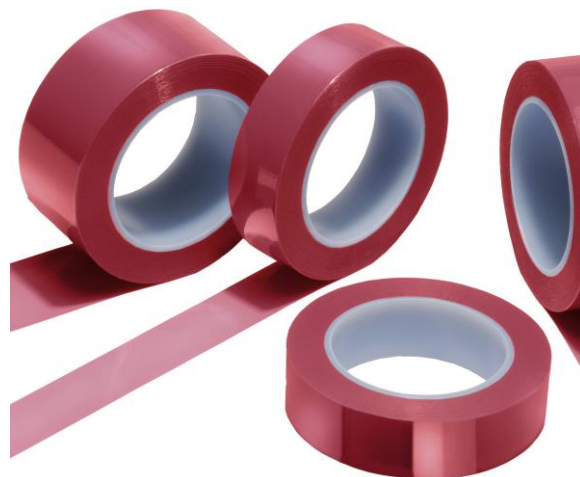

### Technical Data :

| Carrier                    |             | PET               |                |
|----------------------------|-------------|-------------------|----------------|
| Adhesive                   |             | Silicone          |                |
| Carrier Thickness (mm)     | ASTM D 1000 | <b>0.25</b>       | <b>± 0,003</b> |
| Total Thickness (mm)       | ASTM D 1000 | <b>0.10</b>       | <b>± 0,005</b> |
| Adhesion to Steel (N/25mm) | ASTM D 1000 | <b>9.0</b>        | <b>± 0,7</b>   |
| Tensile Strength (N/25mm)  | ASTM D 1000 | <b>98 – 117</b>   | <b>± 20</b>    |
| Elongation (%)             | ASTM D 1000 | <b>90</b>         | <b>± 10</b>    |
| Dielectric Strength (kV)   | ASTM D 149  | <b>5.5</b>        | <b>± 0,5</b>   |
| Class of Insulation (°C)   | UL 510      | <b>B / 130 UL</b> |                |
| Temperature Range (°C)     | For 60'     | <b>-73 to 220</b> |                |
| Tape Length (m)            |             |                   | <b>66</b>      |

NOTE: our recommendations are made in good faith and are based on our experience with this product. Since the conditions of use of this product are beyond our control, this data is given on the express condition and understanding that Finishing Group s.r.l. will not be liable to any person by reason thereof. Nothing herein shall be deemed to be a recommendation to use any product in violation of any existing patent right.